


# MARSHALL MULTISPREAD


## SPREAD TESTS : MODEL 945T - 700mm SPINNERS

CoV is the co-efficient of variation. The lower the CoV in percentage the greater the accuracy of spread. A figure of 15% or less is the industry standard for granulated fertilizers and 25% or less for Lime & similar non-granulated products.

PRODUCT: **LIME (DAMP)**, RPM: **800**, DEFLECTOR CHUTE: **NOT FITTED**,  
VANES: **6 MS SHORT / HOLE 2**, SPEED: **20kph**, RATE: **725kg/ha**, DATE: **10/6/2009**

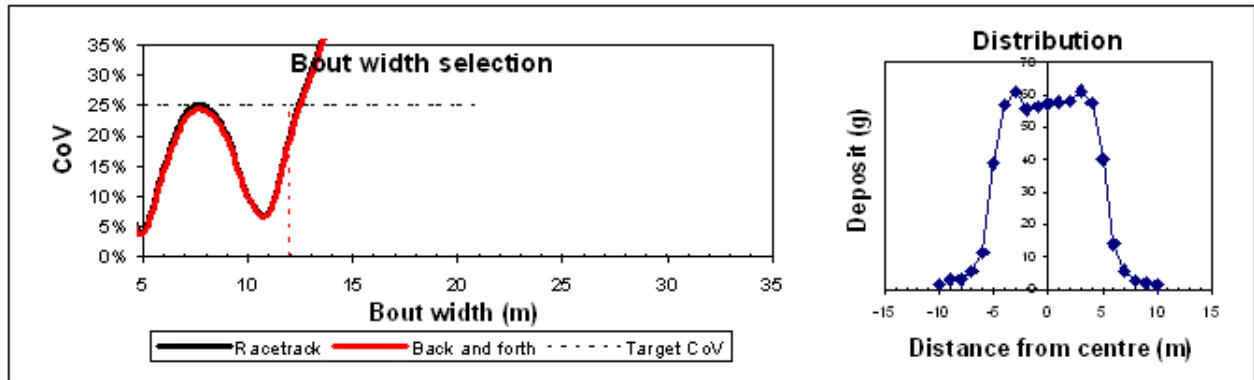

PRODUCT: **UREA (750kg/m<sup>3</sup>)**, RPM: **800**, DEFLECTOR CHUTE: **TYPE C**,  
VANES: **6 MS SHORT / HOLE 2**, SPEED: **20kph**, RATE: **110 kg/ha**, DATE: **9/6/2009**

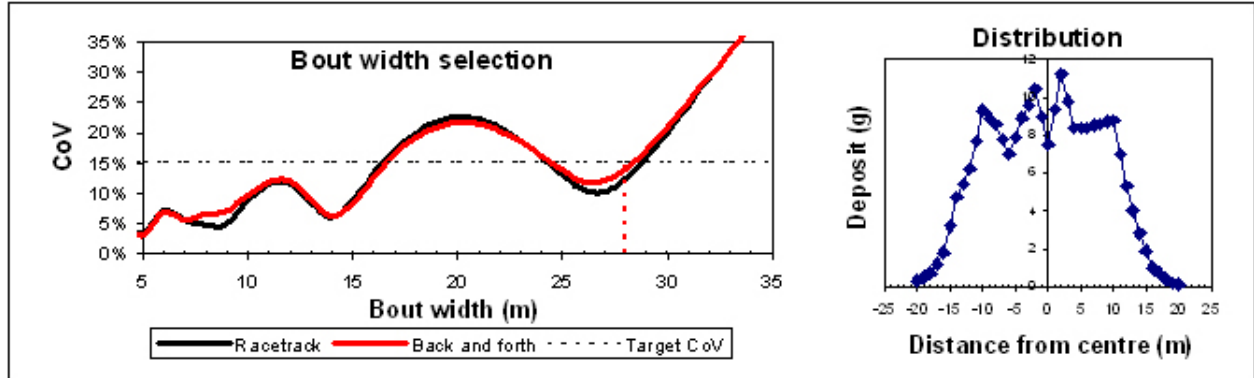

PRODUCT: **COMPOUND FERTILIZER (950kg/m<sup>3</sup>)**, RPM: **800**, DEFLECTOR CHUTE: **TYPE C**,  
VANES: **6 MS SHORT / HOLE 2**, SPEED: **20kph**, RATE: **180kg/ha**, DATE: **12/6/2009**

